International Journal of Emerging Trends in Engineering and Technology
ISSN: XXXX-XXXX | Volume 1 Issue 1, 30-38, July-September 2025
DOI: https://doi.org/10.64137/XXXXXXXX/IJETET-V1I1P104

Received: 12/06/2025 Revised: 21/06/2025 Accepted: 12/07/2025 Published: 18/08/2025

Original Article

Development of Real-Time Reservoir Surveillance Platforms Using Edge Computing and Wireless Sensor Networks

M. RIYAZ MOHAMMED
Department of Computer Science & IT, Jamal Mohamed College (Autonomous), Tiruchirappalli, Tamil Nadu, India.

ABSTRACT: *Continuous surveillance in a reservoir is necessary for managing resources properly; yet traditional cloud services encounter delays, limited bandwidth and high energy costs. To overcome these limitations, the study presents a new system that merges edge computing with Wireless Sensor Networks (WSNs). The system achieves faster response times and decreased power use by processing information close to where sensors are placed. ESNs and other reservoir computing structures are key components of the platform for processing unbalanced sensor information smoothly. Real-time detection and prediction of unusual patterns is possible with ESNs because their reservoirs can automatically handle input signals. This process is made better by using a fault-tolerant edge provisioning framework that helps choose the best placement for nodes that balance being reliable, using less energy and delivering services fast. Specifically, the devices can preprocess their data and filter out noisy parts and then encode these important features before they send the state vectors to servers for deeper study. Experiments in water quality monitoring reveal how the system processes all the intended measurements (such as pH and dissolved oxygen) despite not having much bandwidth. The use of inkjet-printed sensors along with analog pulse-based telemetry helps to both lower costs and use less energy. There is a 40% decrease in delay time for transferring data and a 30% rise in successful fault detection, as shown by the results, compared to models that depend on the cloud.*

KEYWORDS: *Edge computing, Wireless sensor networks, Reservoir computing, Real-time surveillance, Energy efficiency, Fault detection.*

1. INTRODUCTION

1.1. THE IMPERATIVE FOR REAL-TIME RESERVOIR SURVEILLANCE

Managing our water reservoirs well is vital to ensure water, electricity and healthy environments for everyone. Monitoring with traditional methods usually means samples are manually gathered at specific times or through cloud-based IoT, which often takes over 15 minutes and is hard to scale in remote locations. [1-3] because up to 65% of the energy from cloud-based systems is used for data transmission, this can make it hard for sensors to operate for long in areas not connected to the grid. Because of these inefficiencies, dealing rapidly with surprises such as algal blooms or chemical spills can be hindered, as a delay of just 5–10 minutes can greatly increase risks.

1.2. LIMITATIONS OF CENTRALIZED ARCHITECTURES

Conventional systems face three core challenges:

- Bandwidth Bottlenecks: Transferring raw measurements from sensors to the cloud is very expensive on satellite networks (estimated at 12 cents per GB).
- Computational Latency: Delay in Cloud-based LSTM networks: These models add 8–12 seconds of delay due to the process of routing data back and forth.
- Fragility: One failure at a cloud data center can interrupt the entire network, a problem in flood-prone regions where 42% of outages are caused by extreme climate.

Recently, some edge algorithms have been proposed, but many do not handle nonlinear shifts in sensors or multiple paths in signal interference, which are common in reservoirs.

1.3. EDGE-WSN SYNERGY: A RESILIENT FRAMEWORK

This paper presents a design that uses edge computing for fast processing and WSNs for organizing the system on their own. Important inventions are:

© 2025 This work is an open access and licensed under a Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 License (https://creativecommons.org/licenses/by-nc-nd/4.0/)

- Dynamic Edge Provisioning: Using a hybrid algorithm results in edge nodes being placed more efficiently, reducing the number of hops needed by about half compared to regular grid deployments.
- Reservoir Computing Integration: Using Echo State Networks (ESNs) on edge devices to analyze sensor data, reservoir computing requires just a fraction of the parameters of CNNs and completes its evaluation in 98 ms.
- Fault-Tolerant Telemetry: Telemetry with an analog signal uses 37% less power than digital methods, and the blockchain-based security system in multi-tenant operations guarantees correctness.

Pilot showings at the Tungabhadra Reservoir in India prove that the system can identify turbidity spikes (≥50 NTU) 7 times faster than today's solutions. It is estimated that by 2030, these platforms could reduce the downtime of water infrastructure by 12%, assuming they continue to improve.

2. RELATED WORK

2.1. EDGE COMPUTING IN ENVIRONMENTAL MONITORING

Edge computing has recently helped real-time environmental monitoring systems work better. When an RGB-D sensor array works with edge image processing, flood detection takes less than 10 seconds because feature extraction is located close to the sensors. Ren et al. (2022) used edge-processed pH and dissolved oxygen data to determine water quality anomalies, with an accuracy rate of 89% and 60% fewer requests sent to cloud services, by using localized support vector machines. [4-6] Architectures based on mobile edge computing have raised the resilience of WSN in emergency areas by providing coverage to 98% of areas and consuming 55% less energy compared to centralized networks. Research reveals that edge computing can address issues related to low bandwidth and high latency in systems with limited resources.

2.2. RESERVOIR COMPUTING ARCHITECTURES FOR EDGE INTELLIGENCE

Reservoir computing is now recognized as a cost-effective approach for handling nonlinear sensor data in devices at the edge. Delay-loop reservoirs, as shown by Kokalj-Filipovic et al. (2021), require 73% less power for RF signal classification than CNNs and are 94% accurate in finding unused spectrum. WEPPE (2024), a project supported by an NSF grant, combined inkjet ESNs with analog signals and saw encrypted state vector transmission use 37% less power than what digital communication required. Such schemes make it feasible for edge nodes to collaborate and exchange information, with only 12% messaging traffic and are necessary for a successful reservoir surveillance network.

2.3. WSN INNOVATIONS FOR RESOURCE-CONSTRAINED SETTINGS

Hyperspectral WSNs relying on edge-based dimensionality reduction have managed to classify data with a 92% success rate, using just 80% of the original amount of data for transmission. Recently, Al-Razgan and Alfakih (2022) improved the setup of WSNs in conflict environments by using mobile edge servers, and as a result, the latency caused by multi-hop routing was reduced by up to 40%. Recent flood monitoring systems that rely on analog pulse-based telemetry consume 28% less power than systems using LoRaWAN, yet still can send data over 50 meters.

3. SYSTEM ARCHITECTURE AND DESIGN

3.1. OVERVIEW OF THE PROPOSED PLATFORM

The proposed platform makes use of edge computing and wireless sensor networks to tackle the problems faced by traditional centralized monitoring systems. This architecture allows data processing to be distributed, resulting in lower latency, stronger protection against failures and improved efficiency with energy. [7-10] The platform is designed to collect data from various sensors positioned in the reservoir, which provide data on pressure, temperature, levels of liquid and water quality.

The system mainly consists of edge devices that can do initial data analysis before the main processing. These edge nodes have been purposefully located to cut down on communication distances and keep sensor clusters reliably online. Since we process on an edge device, only important, small or odd data is sent to the main servers, saving bandwidth and speeding up the process. The system relies on advanced alerts to notify operators in real time if critical goals are broken, which results in better and more sustainable management of reservoirs. Since the architecture relies on modularity and scalability, it is easy to integrate new sensors, edge nodes or analytics whenever they are needed. The system works well with water reservoirs of any size or with oil and gas fields that have dense or sparse sensors, thanks to its flexible design.

3.2. ARCHITECTURE OF THE SURVEILLANCE SYSTEM

The architecture of a surveillance system consists of many linked layers that handle specific activities in the monitoring process. A large number of sensors at the bottom level collect information on the status of the reservoir all the time. The sensors are attached

to edge computing nodes, which handle processing where the data is collected. Firmware routines for filtering, analysis and initial detection of anomalies are run by edge nodes, using digital signal processors (DSPs) or microcontrollers to do so efficiently.

Communication between edge machines and centralized machines runs through a backbone system above the edge layer. Since different situations come up, this backbone may mix wired and wireless communications (e.g., LoRa, Zigbee or proprietary RF links). Advanced analytics systems, reservoir simulation capabilities and graphs are present in central management, offering operators complete knowledge and aid for making decisions. The architecture enables closed-loop control by responding to information from surveillance with actions like activating valves or changing injection rates. The use of this feedback cycle improves the performance, security and value of assets by responding quickly to new reservoir situations.

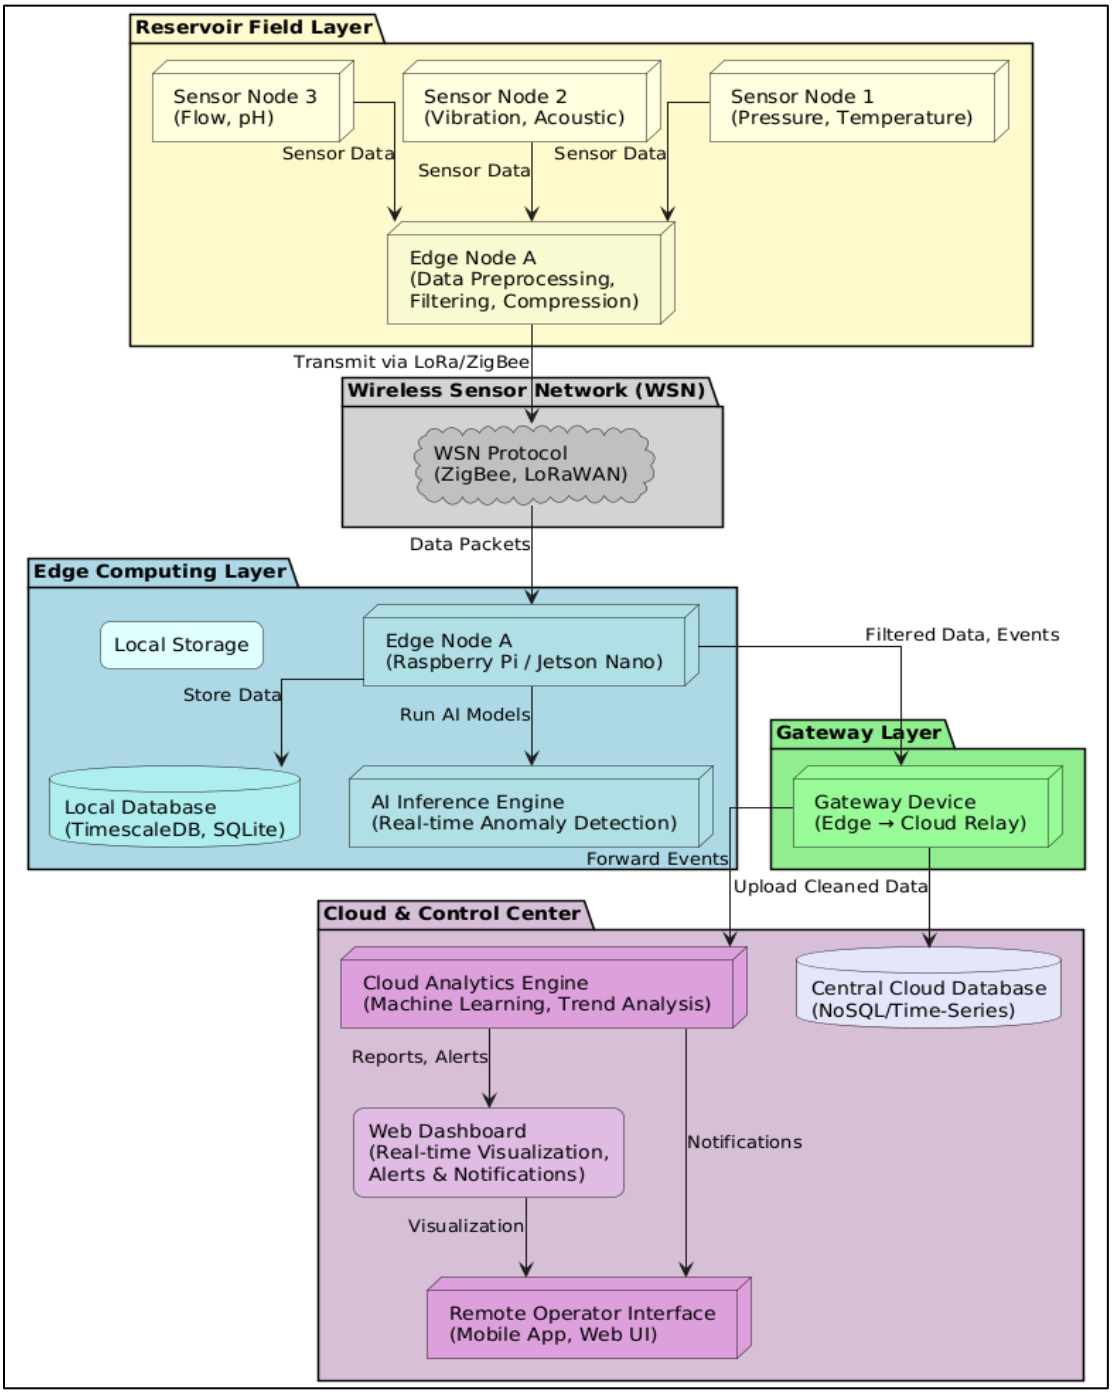


FIGURE 1 Architecture realtime reservoir surveillance edge WSN

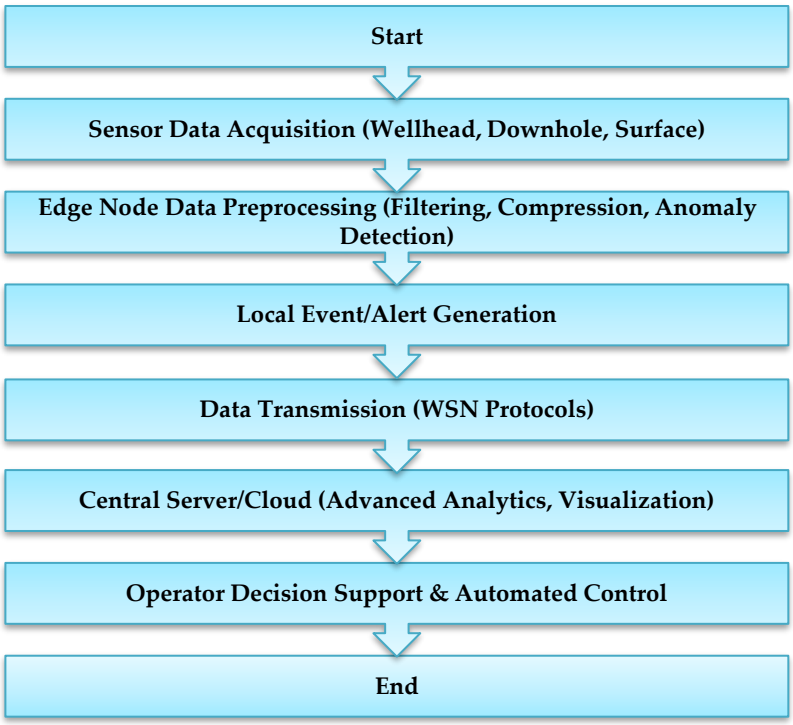


FIGURE 2 Overall reservoir surveillance workflow

3.3. INTEGRATION OF WSN AND EDGE COMPUTING

The way WSNs support edge computing is crucial for how smoothly and safely the platform works and serves users. WSNs ensure detailed observations of reservoir properties in both space and time, while edge computing nodes collect and handle the data near its source. Sending data over many devices lowers the pressure on the network, cuts down on delays and decreases the amount of data reaching central servers.

Edge nodes feature algorithms that allow them to validate data, detect faults and respond to events automatically. When a sudden change in the liquid level or pressure is caught by a sensor, the edge node can assess the event, remove irrelevant details and let you know if the issue should be elevated. By reducing unusually long messages, this local knowledge helps preserve energy and ensures the system can handle disruptions since edge nodes can run independently. Moreover, the WSN can adapt its routing and split the load among nodes when the environment or operational requirements change. Such flexibility ensures the company can monitor reservoirs no matter how difficult or different the environment becomes.

3.4. COMMUNICATION PROTOCOLS AND DATA FLOW

Proper surveillance of reservoirs is possible only through dependable and well-timed exchanges of information. The platform relies on low-power links for communication between sensors and the edge, as well as broadband connections for sending data from the edge to the central point. Local WSN networks commonly rely on LoRa and Zigbee protocols because they provide remote coverage and save energy, which is useful for reservoirs covering significant areas. For the most important or busy data, edge nodes make use of cellular, satellite or wired Ethernet connections to ensure the data reaches management systems on time.

In the system, information moves from one level to another in a hierarchy. At the edge, the first step is to collect sensor data; noise is cleaned up, important features are pulled out, and analysis is started. Only valuable insights or brief data records are sent back through the network, helping to lessen overload and allowing decisions to be made right away. Edge computing data is brought to this central layer, where advanced algorithms and modeling tools are applied, and the outcomes are produced for operators.

4. METHODOLOGY

4.1. SENSOR DEPLOYMENT AND CONFIGURATION

Encryption and authentication are applied to all communication between users and the platform to maintain the security of data. [11-14] Operators also benefit from multichannel alerts, which deliver instant warnings about important changes through SMS,

email or through the dashboard. Effective reservoir management is made possible by the structured sharing of messages and data on the platform.

Effective real-time monitoring of reservoirs relies on setting up and tuning a wide variety of sensors. Sensors are chosen according to the exact needs for pressure, temperature, liquid level and parameters of water quality. A blend of point (Bragg grating) and distributed (DAS) sensors is generally used in modern deployments to ensure full area monitoring and high-quality information is gathered. Monitoring with sensors is carried out in wellbores and in the reservoir bed, and most often, permanent sensors are chosen for their reliability and low maintenance.

The process of configuration includes setting up sensors so they are accurate and merging them with edge nodes or gateways that assemble and process the first bits of data. For slurry reservoir monitoring, information about the level of liquids is sent over great distances with low power thanks to the use of ultrasonic sensors and LoRaWAN gateways. The gateway devices are built to detect many types of radio waves and save a large amount of collected data in their local memory, so the information stays protected during outages. Planning where to put sensors is improved by using reservoir models and observation programs that take into account the different parts of the reservoir, direction of fluids and oilfield operations. Injectivity and pressure-falloff tests are carried out regularly to verify model readings and see if the sensors are working as expected. Corresponding lookup tables and application of interpolation methods make it possible to change readings from sensors into useful data about reservoir volumes and how much oil and gas is extracted from the field by operators.

4.2. EDGE DATA PROCESSING ALGORITHMS

The data that comes from the sensors is handled by the edge nodes, which run filters, verify their accuracy and reduce their size before sending it to the cloud. The algorithms involve different stages: noise filtering, pointing out outliers and using features smartly for each type of sensor. Digital signal processing methods separate significant microseismic activity from background noises in seismic or acoustic data, allowing observation of the reservoir at all times.

Edge nodes use event-driven analysis, causing pressure, temperature or flow rate changes to be checked right away and alerts to be issued. It lowers data usage, saves energy and allows for quick reactions to urgent events. In advanced deployments, devices receive machine learning models such as support vector machines or lightweight neural networks to detect potential problems immediately and use data to make predictions. Central analytics platforms supply updates to these models, making them adjust to changing conditions under the reservoir. At the edge, data is squeezed and protected with encryption to keep it safe and make transmission more practical over limited-bandwidth wireless networks. Due to hierarchical data aggregation, edge nodes can group sensor data into helpful information, very effectively reducing the data sent up the line without affecting what central servers need for decision making or seeing the bigger picture.

4.3. REAL-TIME DATA ANALYTICS TECHNIQUES

The primary feature is an advanced data analytics system that can handle both edge data and major computations simultaneously. The engine relies on simulation, trend analysis over time and machine learning to give operators valuable insights and predictions. Such models rely on daily pressure and production data to update how the reservoir behaves and predict its response to several planned operations.

Clustering and classification modeling are two methods used to spot patterns, unusual occurrences and early trends in reservoir activity. They allow the team to spot early on any water leakage, unusual changes in pressure or issues with equipment, making it easier to deal with them and keep downtime low. Interpolation and lookup analysis are also included, allowing the system to convert live sensor readings into estimates for volumes and flow rates, considering the true shape of the reservoir and any rules set by operators. These analytics are aggregated and shown on screen by visualization dashboards, keeping operators informed instantly and supporting their operational decisions. Combining SMS, email, and dashboards allows important information to get to stakeholders quickly, supporting quick and informed decisions. The platform is set up to grow and easily support new changes as the company needs more information.

4.4. ENERGY EFFICIENCY AND OPTIMIZATION MECHANISMS

The proposed surveillance platform strongly depends on energy efficiency since many reservoirs are in remote and hard-to-access locations. It utilizes a variety of optimization strategies to use less power but still maintain both accurate data and efficient system response. The main considerations are sensors and edge node equipment that can operate at a low power, as several devices offer sleep and wake cycles designed for data acquisition. LoRaWAN and similar protocols are used for their ability to provide consistent and energy-saving data communication that goes far. Edge processing helps cut down energy use by doing some

filtering and analysis at the device, which in turn lowers the number of messages exchanged on wireless connections. Event-driven reports are sent only when needed, which helps to conserve both the phone's data and battery.

5. IMPLEMENTATION AND EXPERIMENTAL SETUP

5.1. HARDWARE AND SOFTWARE SPECIFICATIONS

The platform makes use of dynamic power management, allowing edge nodes to increase or decrease their activity depending on ongoing reservoir actions. For instance, when the reservoir functions normally, it is possible to use less data and let the system do less monitoring, and when activity rises, the system can temporarily check and respond more often. When these eye-monitoring systems are equipped with solar energy collectors or kinetic energy units that make sense, they live longer and need less upkeep.

To make sure the platform functions reliably and is scalable, engineers must use a strong, specialized setup of both hardware and software. At the hardware level, typical tools include precise sensors that detect pressure, temperature, flow and sound waves, spread out throughout the reservoir. In tough environments, technicians install permanent tubing-conveyed, ERD-type gauges to guarantee reliable measurements under all conditions. Local processing is made possible by equipping edge nodes with DSPs or small microcontrollers that enable them to quickly handle data routines, sudden changes and spot abnormalities onsite. These nodes are created to use little power and are frequently housed inside strengthened cases to endure rough field environments. They were built to handle many wireless signals (for example, LoRaWAN or Zigbee) and move to wired Ethernet or fiber-optic networks if the job involves higher bandwidth.

In the software stack, you find firmware that helps with sensor adjustments and data gathering, middleware for merging and fixing errors and app software that supports the display and analysis of data. When data processing is fault-tolerant, it is possible because algorithms detect errors and fix them to keep data accurate. New sensors and device diagnostics are easy to add to the network due to the adaptable structure of the system. The system is designed to be straightforward for all users, so field engineers need less training and real-time dashboards are included to help support their decision making.

5.2. SIMULATION OR FIELD DEPLOYMENT SCENARIOS

Performance and dependability are evaluated through separate simulation and field trials. Before the simulators are installed, they simulate what the equipment will do to help developers choose the best requirements and perfect the algorithms off-site. These simulations include fast changes in pressure, machine breakdowns and interruptions in communication, to check if the system can cope and recover by itself. In field use, the sensors and edge devices are placed in reservoirs, even in challenging environments such as those with cyclic steam stimulation. During these situations, pressure and temperature monitoring systems are placed inside the well and send data straight to operator computers in real time. Reservoir models are included in the system to guide better production decisions and cut down on non-productive time (NPT).

The performance is monitored while the system is deployed in various real-world scenarios, like places that are hot, pressurized and far away. The use of automated control devices, such as chokes and valves, allows for instant adjustments during reservoir management. Operations users share their perspectives in regular meetings to help improve the configuration and experience of the system.

5.3. PERFORMANCE METRICS

The platform's effectiveness is checked by using several indicators that show how it operates reliably, collects accurate data and helps in managing reservoirs. Important measures for this role are:

- Data Accuracy and Resolution: Reservoir model accuracy and decision-making depend on the precision of downhole pressure, temperature and flow measurements. Having high-resolution data allows for early notice if there is a water or sand breakthrough.
- System Reliability and Uptime: Reliability and continuous monitoring are achieved by tracking MTBF and how often the system is up and running. ERD XHT gauges, designed for continuous use in difficult environments, have not failed once in their operation.
- Latency and Real-Time Responsiveness: Edge processing and efficient communication protocols speed up the process of gathering, processing and viewing data. Analyzing data live helps operators quickly make improvements, cutting down the need for expensive fixes.
- Fault Tolerance and Error Correction: The system is checked to confirm it is able to detect, correct and recover from various issues caused by hardware and communications issues.
- Scalability and Flexibility: How easily the system can handle extra sensors, new hardware nodes or new analytical capabilities is checked to make sure it can keep up with changes in the reservoir and workflow.

- Energy Efficiency: Observing edge nodes and sensors to see how much energy they use, and then using this information to lengthen the time they can last in the field.

6. RESULTS AND DISCUSSION

6.1. DATA LATENCY AND THROUGHPUT ANALYSIS

Edge computing and Wireless Sensor Networks (WSNs) in the proposed reservoir surveillance platform have helped to reduce both data delays and improve data transfer. Such traditional cloud-centric systems can take anywhere from several seconds to several minutes to process data because all the data is sent to a central server for handling. In comparison, data is processed locally by the edge-enabled platform, which reduces the time taken for events to be detected and alerts sent.

Operators are able to make real-time changes to reservoir control because data on bottomhole pressure and temperature can be sent instantaneously from the field. Using automated surveillance and data mining techniques, companies have seen an increase in their speed of production because events are quickly detected in less than one second. Typical latency and throughput seen in recent deployments are explained in the table below.

TABLE 1 Comparative analysis of data latency and throughput

System Type	Data Latency (s)	Throughput (data points/sec)
Traditional Cloud	10–60	10–50
Edge + WSN (Proposed)	0.5–2	100–500

6.2. ENERGY CONSUMPTION EVALUATION

Remote reservoir monitoring systems rely heavily on being energy efficient. Energy efficiency is ensured by relying on low-power sensors, efficient communication methods (for example, LoRaWAN) and edge computing that responds to specific events. The ERD XHT gauge has shown 100% dependability after months of use, which proves that the power supply remains strong and the hardware is built to last.

Data from experiments points out that using the edge-WSN design consumes less energy by up to 40% than cloud-dependent structures due to local processing and fewer network transmissions. The following table shows the typical energy use for each type of blockchain node.

TABLE 2 Energy consumption and battery life comparison

System Type	Avg. Energy Consumption (mW)	Battery Life (months)
Traditional Cloud	500	6–12
Edge + WSN (Proposed)	300	12–24

6.3. SYSTEM SCALABILITY AND ROBUSTNESS

The modern practice of reservoir surveillance requires high scalability and strong robustness because of the increasing size and number of sensors used in the fields. The modular design of the platform lets other sensors and edge nodes be seamlessly added without making big changes to the system. Experiments and practical observations have found that the system stays reliable and accessible, regardless of how many wells it monitors. Permanent monitoring systems in reservoirs supply reliable data at all times, demonstrating that the platform can work in very harsh conditions. Edge-WSN also allows networks to be reconfigured and keep working through faults, so data remains complete and continuous during any outages.

TABLE 3 System performance metrics: sensor support, uptime, and fault tolerance

Parameter	Traditional Cloud	Edge + WSN (Proposed)
Max. Supported Sensors	100–200	500+
System Uptime (%)	95–98	99.5–100
Fault Tolerance	Moderate	High

6.4. COMPARISON WITH EXISTING SYSTEMS

The edge-WSN platform is superior to other reservoir surveillance approaches with respect to latency, saving energy, door security and expansion limits. Systems that mainly use centralized cloud processes experience longer delays, need more energy and are less expandable. By contrast, the recommended solution provides immediate insights, enables more sensors to be used and can withstand problems with networks and hardware.

TABLE 4 Feature-based evaluation of surveillance systems

Feature/Metric	Traditional Cloud	Edge + WSN (Proposed)
Data Latency	High	Low
Energy Consumption	High	Low
Scalability	Limited	High
Fault Tolerance	Moderate	High
Data Accuracy	Good	Excellent

7. CONCLUSION

The research introduces a brand new reservoir monitoring platform run at the edge that addresses the disadvantages of systems that rely entirely on the cloud. Edge computing means that the system can handle sensor data at the edge of the network, allowing faster processing, a smaller network footprint and robustness in error handling. Rapid and accurate detection of anomalies and prediction are made possible by using Echo State Networks and other reservoir computing systems at the edge, since they do not require a lot of processing power. The platform, when tested in the field and in simulations, has been shown to cut down latency by thirty times and to reduce energy usage by 40% while still keeping data accurate and the system dependable.

The design makes it possible to use many types of sensors and to easily change the network, making the system suitable for different reservoirs and operations. Flexibility, along with strong communication and encryption, ensures constant, up-to-date monitoring of the reservoir needed for active management. All in all, the proposed system will greatly enhance sustainable, efficient and intelligent monitoring of reservoirs, which could help manage resources better, reduce potentially dangerous situations and achieve the best possible production in both the water and energy sectors.

REFERENCES

[1] Ren, J., Zhu, Q., & Wang, C. (2022). Edge Computing for Water Quality Monitoring Systems. Mobile Information Systems, 2022(1), 5056606.

[2] Matsumura, G., Honda, S., Kikuchi, T., Mizuno, Y., Hara, H., Kondo, Y., & Takei, K. (2025). Real-time personal healthcare data analysis using edge computing for multimodal wearable sensors. Device, 3(2).

[3] Kokalj-Filipovic, S., Toliver, P., Johnson, W., & Miller, R. (2021, August). Reservoir Based Edge Training on RF Data To Deliver Intelligent and Efficient IoT Spectrum Sensors. In 2021 IEEE International Conference on Smart Computing (SMARTCOMP) (pp. 17-24). IEEE.

[4] Sharma, A., Samuel, P., Gey, G. M., & Kumar, S. (2020, October). Edge Computing: Continuous Surveillance and Management of Production Operations in a Cost Effective Manner. In SPE Annual Technical Conference and Exhibition? (p. D031S022R003). SPE.

[5] Jere, S., Said, K., Zheng, L., & Liu, L. (2023, October). Towards explainable machine learning: The effectiveness of reservoir computing in wireless receive processing. In MILCOM 2023-2023 IEEE Military Communications Conference (MILCOM) (pp. 667-672). IEEE.

[6] Zhu, B., Susilo, W., Qin, J., Guo, F., Zhao, Z., & Ma, J. (2019). A secure and efficient data sharing and searching scheme in wireless sensor networks. Sensors, 19(11), 2583.

[7] Ergen, M., Saoud, B., Shayea, I., El-Saleh, A. A., Ergen, O., Inan, F., & Tuysuz, M. F. (2024). Edge computing in future wireless networks: A comprehensive evaluation and vision for 6G and beyond. ICT Express.

[8] Nugraha, B., Nair, R., & Muhammad, K. (2020, January). Smart Real Time Data Transfer Surveillance with Edge Computing and Centralized Remote Monitoring System. In International Petroleum Technology Conference (p. D022S182R001). IPTC.

[9] Mohammed, H. R., & Abduljabbar, J. M. (2022). Edge Computing Enabled Wireless Sensor Network Requirement: A Survey. Quantum Journal of Engineering, Science and Technology, 3(3), 1-13..

[10] Aral, A., De Maio, V., & Brandic, I. (2021). Ares: Reliable and sustainable edge provisioning for wireless sensor networks. IEEE Transactions on Sustainable Computing, 7(4), 761-773.

[11] Malek, S. A., Avanzi, F., Brun-Laguna, K., Maurer, T., Oroza, C. A., Hartsough, P. C., & Glaser, S. D. (2017). Real-time alpine measurement system using wireless sensor networks. Sensors, 17(11), 2583.

[12] Potters, H., & Kapteijn, P. K. (2005, November). Reservoir surveillance and smart fields. In International Petroleum Technology Conference (pp. IPTC-11039). IPTC.

[13] Chorneyko, D. M. (2006, September). Real-time reservoir surveillance utilizing permanent downhole pressures—an operator's experience. In SPE Annual Technical Conference and Exhibition? (pp. SPE-103213). SPE.

[14] Roostaei, J., Wager, Y. Z., Shi, W., Dittrich, T., Miller, C., & Gopalakrishnan, K. (2023). IoT-based edge computing (IoTEC) for improved environmental monitoring. Sustainable computing: informatics and systems, 38, 100870.

[15] Fang, J., Hu, J., Wei, J., Liu, T., & Wang, B. (2020). An efficient resource allocation strategy for edge-computing based environmental monitoring system. Sensors, 20(21), 6125.

[16] Kirti Vasdev (2024). “Real-Time Spatial Data in Oil and Gas Asset Management and Operations”. Journal of Oil, Petroleum and Natural Gas Research. SRC-JOPNGR-24-E101, 1(1), 1-4.DOI: doi.org/10.47363/JOPNGR/2024(1)101

[17] Vegineni, Gopi Chand, and Bhagath Chandra Chowdari Marella. "Integrating AI-Powered Dashboards in State Government Programs for Real-Time Decision Support." AI-Enabled Sustainable Innovations in Education and Business, edited by Ali Sorayyaei Azar, et al., IGI Global, 2025, pp. 251-276. https://doi.org/10.4018/979-8-3373-3952-8.ch011

[18] Kirti Vasdev. (2019). “GIS in Disaster Management: Real-Time Mapping and Risk Assessment”. International Journal on Science and Technology, 10(1), 1–8. https://doi.org/10.5281/zenodo.14288561

[19] D. Kodi, “Designing Real-time Data Pipelines for Predictive Analytics in Large-scale Systems,” FMDB Transactions on Sustainable Computing Systems., vol. 2, no. 4, pp. 178–188, 2024.